

# Patay - CHEMICAL PUMPS

- Pumps all solvents
- Operates at -200 to +200°C
- Self-priming
- Stainless steel & PTFE construction
- 4 strokes per litre

The Pageboy HP250 is a hand-operated piston pump manufactured in AISI 316 stainless steel with PTFE seals, recommended for all solvents, paints, petrol, oils, essential oils, demineralised water etc.

#### Technical data (water at 20°C)


Maximum output	15 lit/min (depends on operator)
Maximum head	20m
Maximum suction lift	8m
Suction	1/2" BSPf
Discharge	3/8" BSPf
Weight	2kg
Length (overall)	476mm
Outlet (centreline)	380mm
Outer tube Ø	38mm

#### Parts List

1 Outer tube	10 Flat seal
2 Seal housing	11 O-ring
3 Shaft	12 Lipseal
4 Suction housing	13 Stop pin
5 Piston	14 Circlip, shaft
6 Piston plate	15 Flat seal
7 Outlet connector	16 Circlip, bush
8 Guide bush	17 Ball
9 Handle	

#### Accessories

- 2" BSPm barrel bung:
  - Malleable iron
  - Stainless steel
  - Stainless steel (gastight)
- Dip tube for 45 gallon drum (Specify bung used)

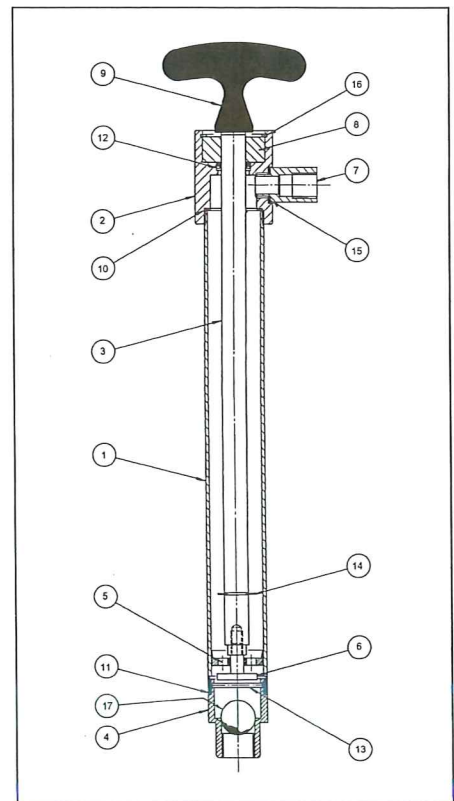

**Pump** *Simply the Best*  
**International Ltd.**